

AURORA II

Glue down LVT



Aurora II

Glue down luxury vinyl tile

Plank dimensions: 2 x 230 x 1229 mm (5.65sqm/box)


by

FINfloor™

www.finfloor.co.za

AURORA II

Glue down LVT

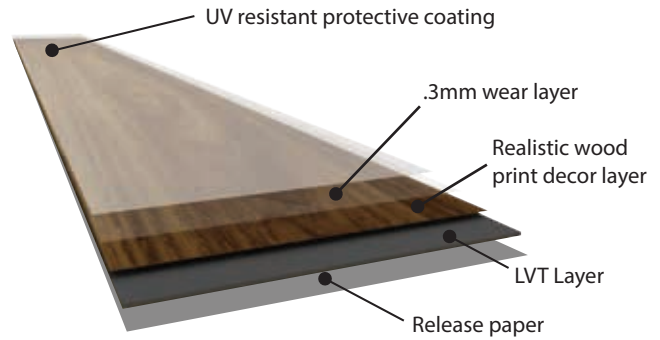

SPECIFICATIONS	GLUE DOWN VINYL TECHNOLOGY
Thickness	2mm
Wear layer	.3mm wear layer
Plank dimensions	2 x 230 x 1229 mm
Packaging Unit	20 pieces per box / 5.65m ²
Texture option/Surface finish	Antique crystal wood finish and 4-sided micro bevel
Installation method	Glue down installation
Warranty	20 years heavy domestic and 5 years light commercial use
Application	Heavy domestic and light commercial
Waterproof	100% topically water-proof

TECHNICAL DATA	GLUE DOWN VINYL TECHNOLOGY			
TEST	EN NORMS	RESULT	ASTM NORMS	RESULT
Dimensional squareness and straightness	EN427	Squareness: 0.18mm Straightness: 0.07mm		
Dimensional stability	EN434	Pass	ASTM F2199	Pass
Impact resistance			ASTM F1265, ASTM D2632	Pass
Abrasion group / wear resistance	EN660-1/2	Group T	ASTM F510, ASTM D3384	Pass
Residual Indentation	EN433	Pass, 0.06mm	ASTMF1914, ASTM F970	Pass
Colour fastness to artificial light	EN20105:B02	Pass > Grade 6	ASTMF1515	Pass
Slip resistance	EN12893	Class DS	ASTM D2047-93	Pass
Sound Reductions	ENISO717-2(ΔLw)	2dB		
Fire classification	ENISO11925-2 EN13501-1 ENISO 9239-1	Bf1-S1	ASTME648-10	Pass/Class1
Electrical resistance	EN1081 Method C	Pass	ASTM F150-06	Pass
Thermal resistance	EN12664	Pass		
Toxic Element Test	EN71-3	Pass, Not Toxic and Does not contain heavy metals and formaldehyde		
Recycled materials	No		No	

INSTALLATION	GLUE DOWN INSTALLATION AND MAINTENANCE GUIDELINE
Caution	Do not expose to direct sunlight. Cover windows
Installation	Adhere to manufacturers installation parameters and read the installation instructions
Cleaning & Maintenance	Only use non-abrasive detergents and a micro-fibre mop Avoid excess exposure to water

CERTIFICATES

