


GALAXY II

Glue down LVT

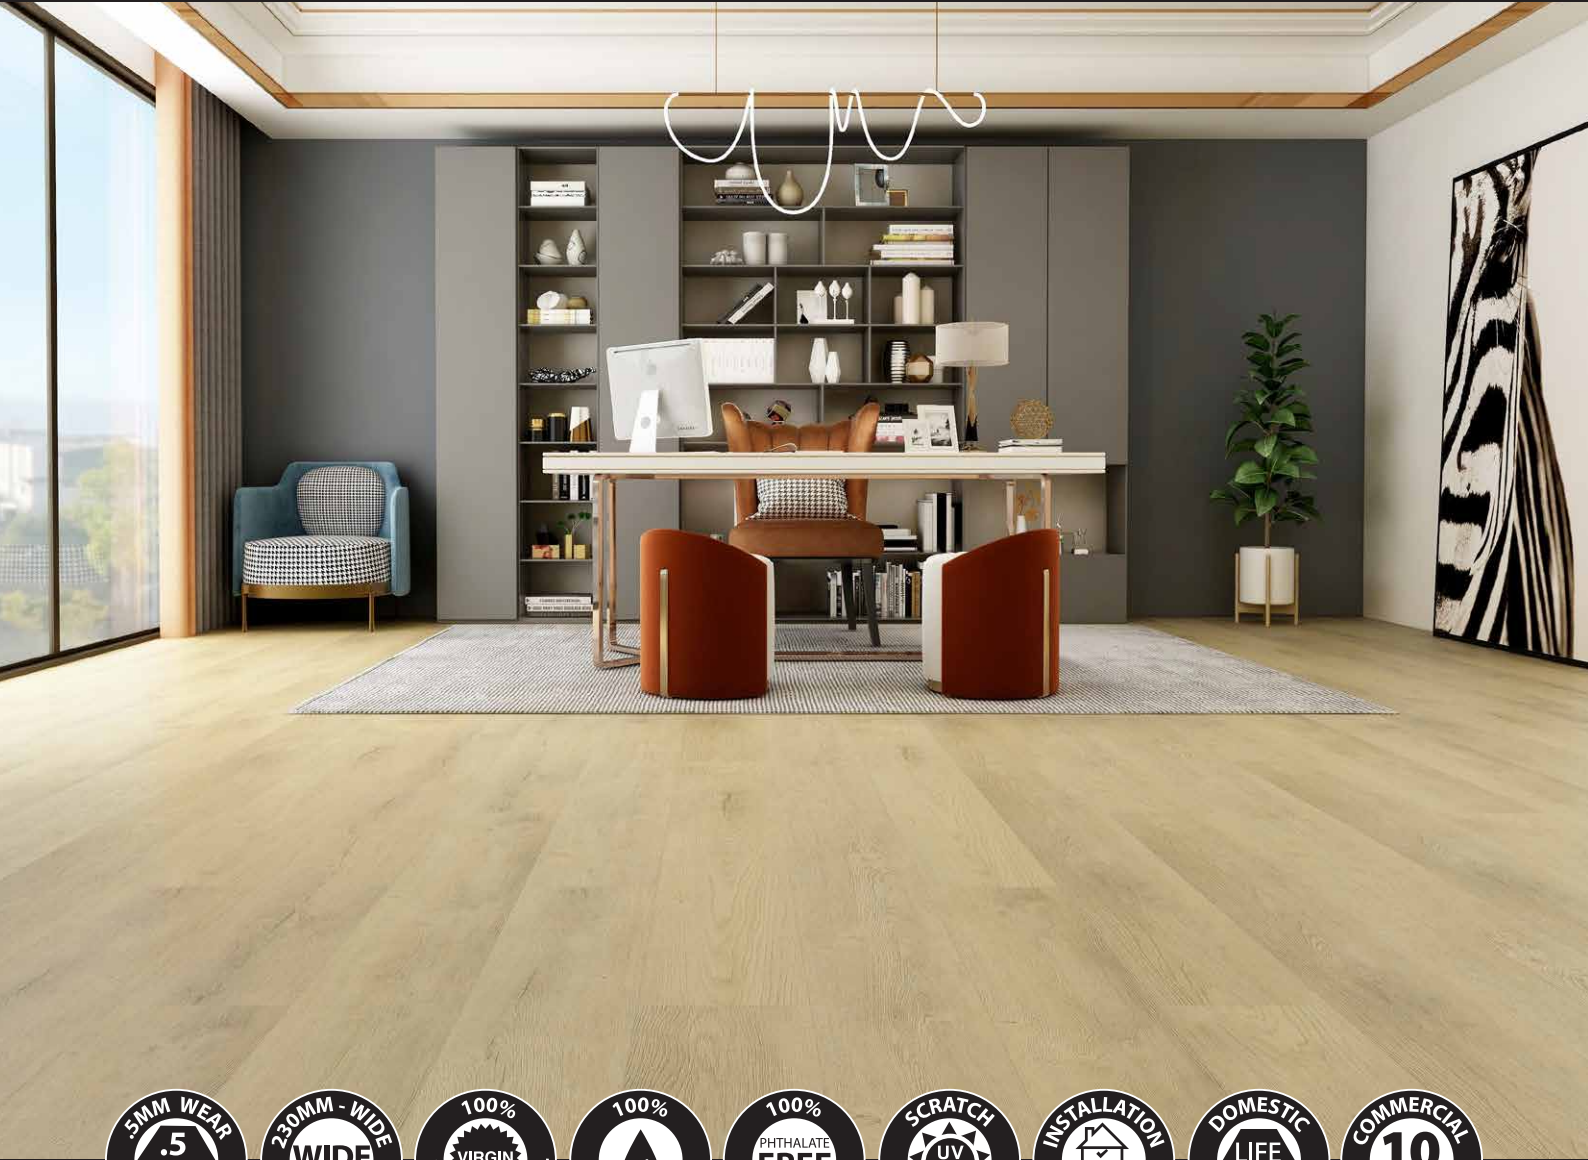

Galaxy II

Commercial glue down luxury vinyl tile

Plank dimensions: 2.5 x 230 x 1526 mm (4.91sqm/box)


by

FINfloor™

www.finfloor.co.za

GALAXY II

Glue down LVT

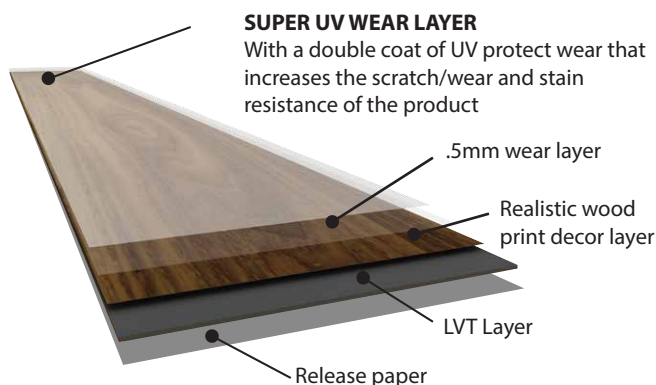

| SPECIFICATIONS | GLUE DOWN VINYL TECHNOLOGY |
|-------------------------------|---|
| Thickness | 2.5mm |
| Wear layer | .5mm wear layer |
| Plank dimensions | 2.5 x 230 x 1526mm |
| Packaging Unit | 12 pieces per box / 4.91m ² |
| Texture option/Surface finish | Antique crystal wood texture or EIR and painted bevel |
| Installation method | Glue down installation |
| Warranty | Life time* heavy domestic and 10 years general commercial use |
| Application | Heavy Commercial |
| Waterproof | 100% topically waterproof |

*The Lifetime structural residential warranty protects against product wear out and manufacturing defects.

| TECHNICAL DATA | GLUE DOWN VINYL TECHNOLOGY | |
|---|---|--|
| TEST | EN NORMS | RESULT |
| Dimensional squareness and straightness | EN427 | Squareness: 0.15mm Straightness: 0.30mm |
| Dimensional stability | EN434 | Pass |
| Impact resistance | EN13329 | Pass |
| Abrasion group / wear resistance | EN660-1/2 | Group T |
| Residual Indentation | EN433 | Pass, 0.06mm |
| Colour fastness to artificial light | EN20105:B02 | Pass > Grade 6 |
| Slip resistance | EN12893 | Class DS |
| Sound Reductions | ENISO717-2(ΔLw) | 4dB |
| Fire classification | ENISO11925-2 EN13501-1 ENISO 9239-1 | Bf1-S1 |
| Electrical resistance | EN1081 Method C | Pass |
| Thermal resistance | EN12664 | Pass |
| Toxic Element Test | EN71-3 | Pass, Not Toxic and Does not contain heavy metals and formaldehyde |
| Recycled materials | No | |

| INSTALLATION | GLUE DOWN INSTALLATION AND MAINTENANCE GUIDELINE |
|------------------------|--|
| Caution | Do not expose to direct sunlight. Cover windows |
| Installation | Adhere to manufacturers installation parameters and read the installation instructions |
| Cleaning & Maintenance | Only use non-abrasive detergents and a micro-fibre mop Avoid excess exposure to water |

CERTIFICATES



SAWLFA
SOUTHERN AFRICAN WOOD, LAMINATE
& FLOORING ASSOCIATION
MEMBER



EN ISO 10582 - Fit for use classification



Heavy Commercial
(Class 33)