



# Inovar floor journey

Inovar Floor was established in 1998 and today is a leading national Finfloor retailer and stockist with specialist in house installation teams across South Africa.

We pride ourselves in providing excellent customer service, quality products and professional installations. With over 22 years of experience and continuous training and upgrading in products and installation methods, our knowledge of flooring is unsurpassed.

We guarantee both the quality of our products from purchase through to installation and also **our workmanship for 2 years from the date of installation.**

## Why we choose Finfloor

- Finfloor pride themselves on quality and will only supply products that are manufactured and tested to meet the highest European standards
- Have been in business for over 24 years
- Offer a written warranty on all ranges
- Outlived their original warranties
- Finfloor SA is a member of SAWLFA and the products within this catalogue conform to SAWLFA prescribed standards



## Contents

### Laminate flooring

AGT - Bella	pg 6-7
AGT - Natura	pg 8-9
AGT - Effect	pg 10-11
Supreme	pg 12-13
Inovar	pg 14-15
Black Forest	pg 16-17
Authentic Herringbone	pg 18-19

### SPC and RCB Vinyl Flooring

Sapphire	pg 20-21
Diamond Core	pg 22-23
Diamond Tile	pg 24-25

### Engineered Wooden flooring

Finoak Unfinished	pg 26-29
Finoak Pre-finished	pg 32-33
Oleum Wood Stains	pg 30-31

### Profiles and Skirting

MDF and Aluminium Profiles	pg 34-35
----------------------------	----------

### Icon Key



Four sided V-groove



Square edge - for a seamless floor with no visible joins



Four sided micro bevelled edge

**NOTE:** The images in this catalogue are a representation only and colours may vary from actual product. It is recommended to see actual samples before placing an order.










FINOAK 15/4 190MM CLEAR GRADE - OLEUM CORNSILK

# Finfloor Laminate and Vinyl flooring comparison tables

## Laminate flooring

Product	AGT - Bella laminate	AGT - Natura laminate	AGT - Effect laminate	Supreme laminate	Authentic Herringbone laminate
	<i>Bella</i>	<i>Natura</i> Line	<b>effect</b>	<b>supreme</b> laminate flooring	<b>AUTHENTIC</b> herringbone

### Composition

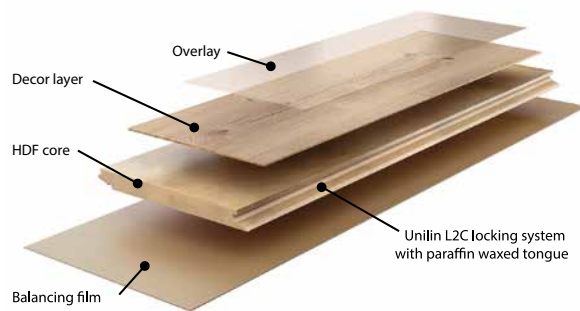

Plank-size	1200 x 193 x 8mm	1200 x 191 x 8mm	1195 x 189 x 10mm	1216 x 239 x 8mm	606 x 101 x 12mm
Wear layer	Protective aluminium oxide overlay			Protective aluminium oxide overlay	Protective aluminium oxide overlay
Wear rating/ Fit for use	AC3/W31 - Square edge Heavy residential Moderate commercial	AC4/W32 - V4 Heavy residential General commercial	AC4/W32 - V4 Heavy residential General commercial	AC3/W31 - V4 Heavy residential Moderate commercial	AC4/W32 - V4 Heavy residential General commercial
Finish	Timberland finish, Square edge	Wood embossed with a 4 sided V-groove	EIR (Embossed in register) 3-d effect with a 4 sided V-groove	Low gloss Cross cut / Wood grain finish with a 4 sided V-groove	Four sided V-groove available in, EIR (embossed in register) or Matt wood grain finish
Core	8mm HDF	8mm HDF	10mm HDF	8mm HDF	12mm HDF
Core Density	> 850-880 kg/m	> 850-900 kg/m	> 850-900 kg/m	> 850kg/m <sup>3</sup>	> 880/890 kg/m <sup>3</sup>
Locking system	Unilin L2C locking system with paraffin waxed tongue	Unilin L2c locking system with paraffin waxed tongue	Unilin L2c locking system with paraffin waxed tongue	Valinge 2G locking system	Single click locking system
Durability	Extremely durable. Highly scratch, impact and abrasion resistant.				
Cleaning	Sweep and vacuum regularly. Make use of dirt trapping mats at entrances. Can be easily cleaned with laminate specific products. Acetone can be used to remove difficult				
Maintenance	Laminate specific products can be used to restore the lustre of the floor colour. Recommended to use a soft bristle broom or brush attachment to a vacuum cleaner to remove				
Waterproof	Have a paraffin waxed tongue for improved water resistance			No	No
Swell rate	≤ 18%	≤12%	≤12%	< 18%	≤12%
Domestic Warranty	10 year heavy domestic	15 year heavy domestic	15 year heavy domestic	10 year heavy domestic	25 year heavy domestic
Commercial Warranty	5 years moderate commercial	5 years general commercial	5 years general commercial	5 years moderate commercial	5 years general commercial use
Termite resistant	No	No	No	No	No

## Vinyl flooring

Inovar laminate

Black Forest laminate

Sapphire vinyl

Diamond Core vinyl

Diamond Tile vinyl







**black forest**

**Sapphire RCB**

**DIAMOND  
CORE SPC**

**DIAMOND SPC Tile**

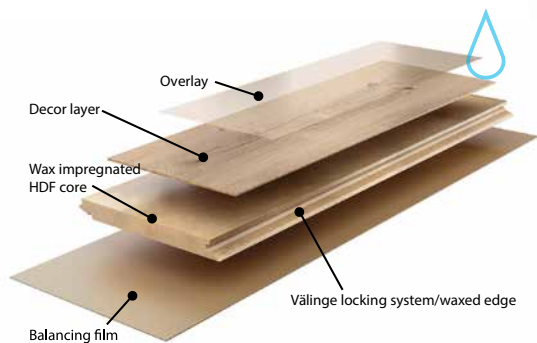

1216 x 196 x 8mm	2200 x 239 x 12mm	1230 x 184 x 5.5 mm	1500 x 228 x 6.5 mm	900 x 450 x 6 mm
Protective aluminium oxide overlay	Protective aluminium oxide overlay	0.3mm Super UV scratch & stain resistant protective wear layer	0.5mm Super UV scratch & stain resistant protective wear layer	0.7mm Super UV scratch & stain resistant protective wear layer
AC4/W32 - V4 Heavy residential General commercial	AC4/W32 - V4 Heavy residential General commercial	Class 32 (Heavy domestic)	Class 34 (heavy commercial)	Class 43 (Light industrial)
Four sided 4 Groove available in, EIR, Medium Emboss, Matt wood grain or cross cutting finish	Four sided 4 Groove available in, EIR (embossed in register) or Matt wood grain finish	Antique wood surface finish with a 4-sided micro bevel	Antique wood texture with a 4-sided micro bevel	Coral stone finish and 4-sided micro bevel
8mm HDF -Dare global core with Wax impregnation	12mm HDF -Dare global core with Wax impregnation	4.5mm SPC/RCB (stone plastic composite / rigid core board)	5mm SPC (stone plastic composite) core	6mm SPC (stone plastic composite) core
> 880/890 kg/m <sup>3</sup>	> 890/900 kg/m <sup>3</sup>	= 2000 kg/m <sup>3</sup>	= 2500 kg/m <sup>3</sup>	= 2500 kg/m <sup>3</sup>
Valinge 2G locking system with waxed edges	Valinge 5G locking system with waxed edges	Unilin locking system	Unilin locking system	Unilin locking system
Primarily scratch & dent resistant. Extremely long lasting		Extremely durable	Extremely durable	Extremely durable
stains. Wet mops should never be used		Must be cleaned using micro mops, soft bristle broom., brush attachment with vacuum cleaner. DO NOT wax.		
loose dirt		No maintenance	No maintenance	No maintenance
Water resistant laminate flooring	Water resistant laminate flooring	100% Water-proof	100% Water-proof	100% Water-proof
≤ 8%	≤ 8%	100% waterproof - does not swell	100% waterproof - does not swell	100% waterproof - does not swell
25 year heavy domestic	25 year heavy domestic	20 year heavy domestic	30 year heavy domestic	30 year heavy domestic
5 years general commercial use	5 years general commercial use	5 years light commercial use	10 years general commercial use	10 years heavy commercial use
Lifetime guarantee against termites	Lifetime guarantee against termites	N/A	N/A	N/A



# Bella

AGT is a well known European brand with more than 60 stores across 5 continents and award-winning manufacturing facilities in Turkey. Since inception AGT have never compromised on their ethical value and quality principles. Quality, trend and development are still our main objectives for all our customers, employees and business partners.

Quality is a goal that is constantly being renewed and developed according to circumstances and changing market requirements. Along with our vision - "Promoting Wood Technology" which gives priority to long term strategic thinking and international compliance AGT will continue to be the preferred choice for those who want quality, aesthetics and elegance.



Technical specifications	Standard	Characteristic/Result
Wear resistance	EN 13329	AC3/W31
Stain resistance	EN 13329	Rating 5 - no visible change
Swelling test	EN 13329	Average swelling ≤ 18%
Light fastness	EN 13329	Grade 6 - No discolouration
Impact resistance	EN 13329	IC1

## PRODUCT INFORMATION AND WARRANTY

« Plank Dimensions: 1200 x 193 x 8mm (2.316 sqm/box )




Core: 8mm H.D.F. core with an average board density > 850 kg/m<sup>3</sup>

Fit for use grading: AC3/W31 – Moderate commercial / Heavy residential

Warranty: 10 years heavy residential / 5 years moderate commercial use






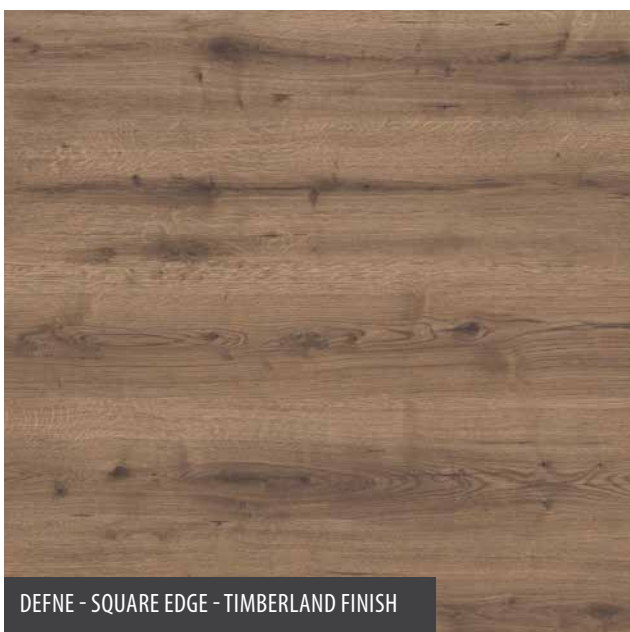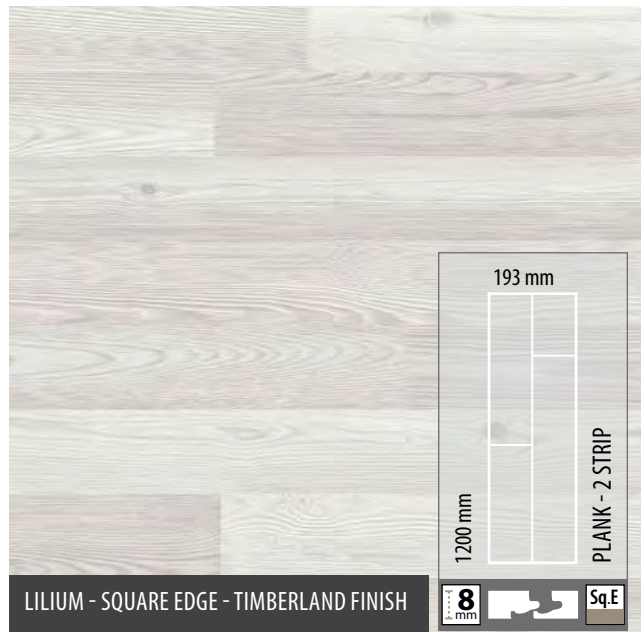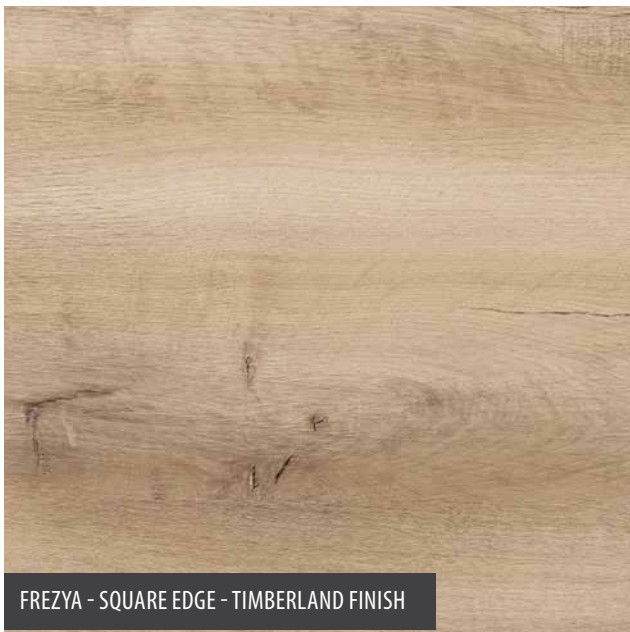

# Natura

Line

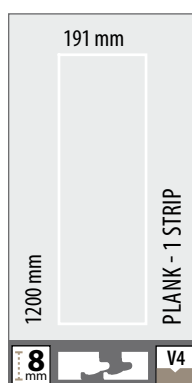

Technical specifications	Standard	Characteristic/Result
Wear resistance	EN 13329	AC4/W32
Stain resistance	EN 13329	Rating 5 - no visible change
Swelling test	EN 13329	Average swelling $\leq 12\%$
Light fastness	EN 13329	Grade 6 - No discolouration
Impact resistance	EN 13329	IC2

## PRODUCT INFORMATION AND WARRANTY

« Plank Dimensions: 1200 x 191 X 8mm (1.83sqm/box )

Core: 8mm H.D.F. core with an average board density  $> 850 \text{ kg/m}^3$



Fit for use grading: AC4/W32 – General commercial / Heavy residential

Warranty: 15 years heavy residential / 5 years moderate commercial use



ILGAZ (ABOVE)



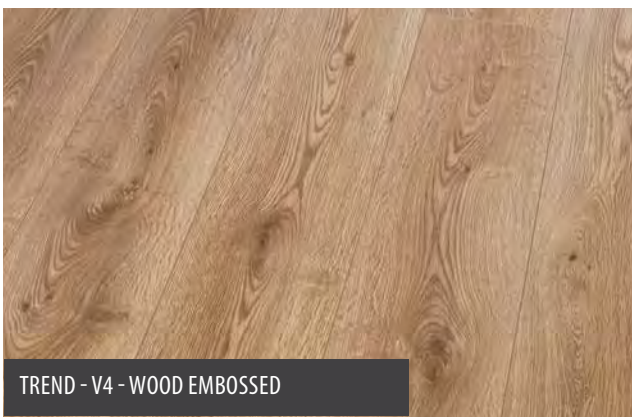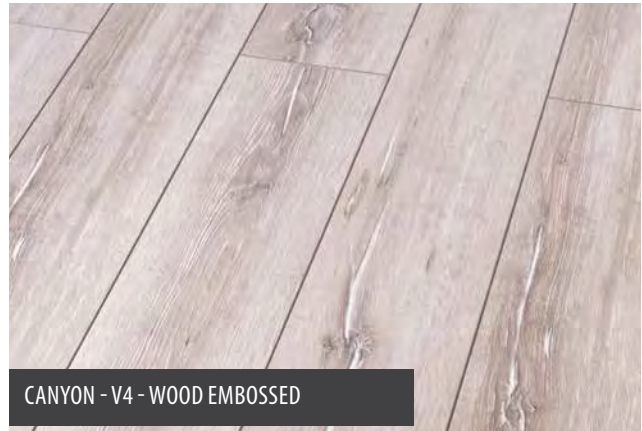




# effect

TIBET (ABOVE)



ALP - V4 - EIR



EVEREST - V4 - EIR



TIBET - V4 - EIR



TOROS - V4 - EIR






**AGT**

**Parke**

EFFECT is the new affordable 10mm commercial laminate flooring range from AGT. With a unique 3D embossed in register surface finish that realistically mimics the wood grain pattern into the planks. For a more natural and realistic wood finish, that you can see and touch.

Experience the naturally enhanced nature of wood with the Effect laminate flooring range.

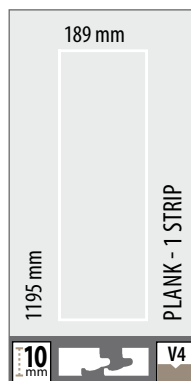

Technical specifications	Standard	Characteristic/Result
Wear resistance	EN 13329	AC4/W32
Stain resistance	EN 13329	Rating 5 - no visible change
Swelling test	EN 13329	Average swelling $\leq 12\%$
Light fastness	EN 13329	Grade 6 - No discolouration
Impact resistance	EN 13329	IC2

#### PRODUCT INFORMATION AND WARRANTY

« Plank Dimensions: 1195 x 189 X 10mm (1.8068sqm/box )

Core: 10mm H.D.F. core with an average board density  $> 850 \text{ kg/m}^3$

Fit for use grading: AC4/W32 – Moderate commercial / Heavy residential

Warranty: 15 years heavy residential / 5 years moderate commercial use



ALTAY - V4 - EIR



PAMIR - V4 - EIR



URAL - V4 - EIR




FUJI - V4 - EIR

# supreme

laminate flooring

*Durable Residential flooring -  
Safe for your family*

GRANITE (ABOVE)

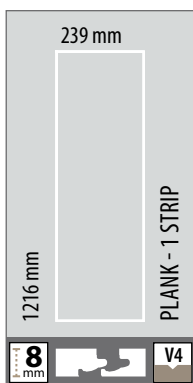

Technical specifications	Standard	Characteristic/Result
Wear resistance	EN 13329	AC3/W31 - V4
Stain resistance	EN 13329	Rating 5 - no visible change
Swelling test	EN 13329	Average swelling < 18%
Light fastness	EN 13329	Grade 6 - No discolouration
Impact resistance	EN 13329	IC1

#### PRODUCT INFORMATION AND WARRANTY

« Plank Dimensions: 1216 x 239 X 8mm (2.325sqm/box)

Core: 8mm H.D.F. core with an average board density > 850 kg/m<sup>3</sup>

Fit for use grading: AC3/W31 – Moderate commercial / Heavy residential

Warranty: 10 years heavy residential / 5 years moderate commercial use

Supreme AC3 laminate flooring can be fitted throughout the home, offering a durable, stain resistant, anti-abrasive and fade resistant solution for many years of use.

With unique patterning technology that uses non-solvent water-based inks, which contain no heavy metals, making this product more environmentally friendly. It also has an E1 rated formaldehyde content, and is 100% bio-degradable which means it does not emit any toxic fumes on combustion.

A low maintenance floor solution that is easily cleaned with a damp cloth.








SIBERIAN - V4 - WOOD GRAIN



SANDALWOOD - V4 - WOOD GRAIN



ASPHALT - V4 - WOOD GRAIN

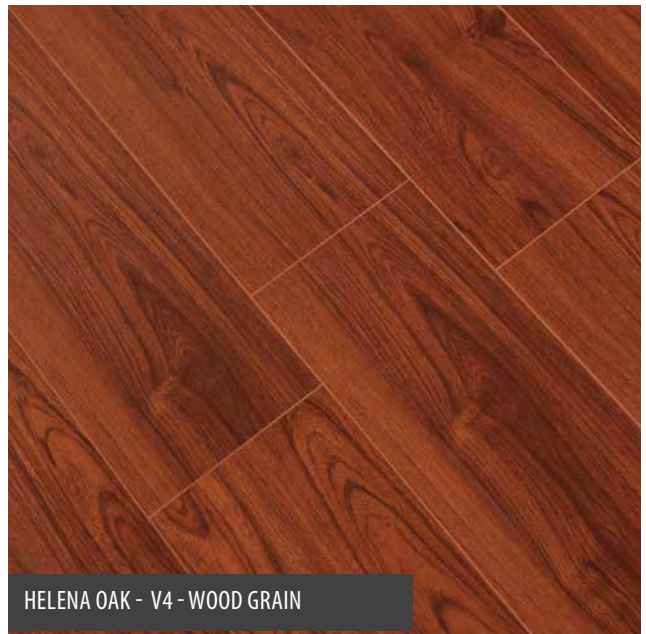

HELENA OAK - V4 - WOOD GRAIN



GRANITE - V4 - WOOD GRAIN



AUTUMN OAK - V4 - LOW GLOSS CROSS CUT






GREY BARK - V4 - CROSS CUTTING



OREGON PINE - V4 - MATT WOOD GRAIN

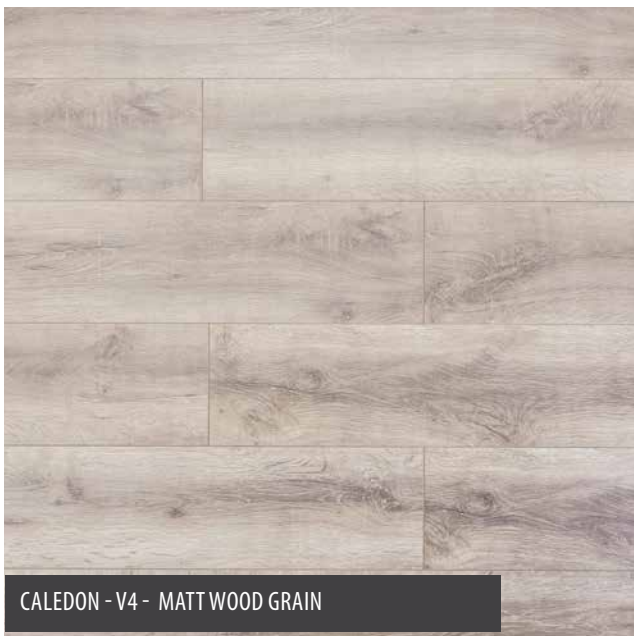


CALEDON - V4 - MATT WOOD GRAIN



BUFFALO - V4 - EIR



ATHENS OAK - V4 - EIR

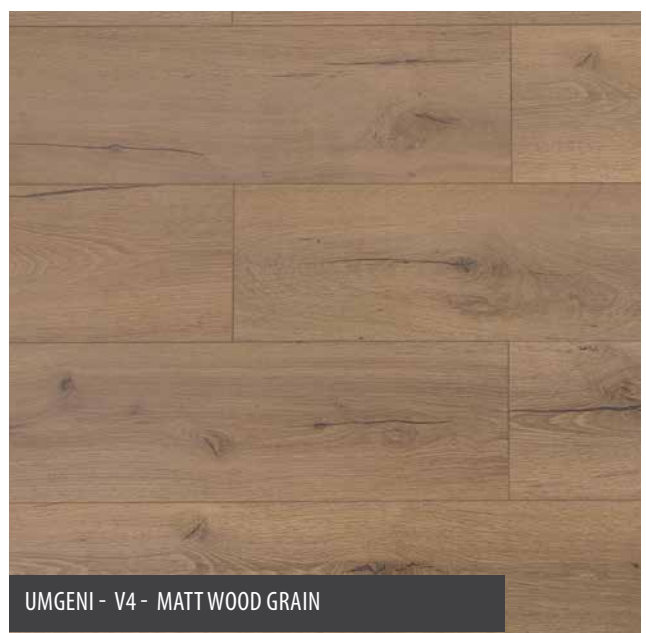

UMGENI - V4 - MATT WOOD GRAIN






Inovar Laminates offer the latest in colour and design, in line with current and contemporary decor trends. Inovar Floor complies to the highest European EN performance standards, using the latest in German technology. Rigorous quality testing ensures exceptional quality is maintained throughout the product.

The healthy choice for your family. Inovar's completely sealed, non-porous surface does not contribute to the growth of micro-organisms, dust-mites and promotes an environment free of allergens - especially for children.

GREY BARK (ABOVE)

## Water resistant laminate flooring

With a wax impregnated core and waxed edges on the locking system, Inovar is highly water resistant and has one of the lowest swell rates available in the South African market place.

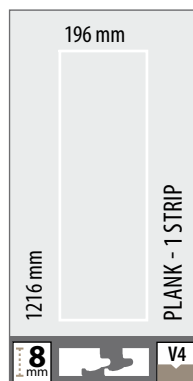

Technical specifications	Standard	Characteristic/Result
Wear resistance	EN 13329	AC4/W32 - V4
Stain resistance	EN 13329	Rating 5 - no visible change
Swelling test	EN 13329	Average swelling $\leq 8\%$
Light fastness	EN 13329	Grade 6 - No discolouration
Impact resistance	EN 13329	IC2

### PRODUCT INFORMATION AND WARRANTY

« Plank Dimensions: 1216 x 196 X 8mm (1.91sqm/box)

Core: Water-resistant H.D.F. core with an average board density  $> 880/890 \text{ kg/m}^3$

Fit for use grading: AC4/W32 – General commercial / Heavy residential

Warranty: 25 years heavy residential / 5 years moderate commercial use





WHITE ELDER - V4 - EIR



SUN BLEACHED OAK - V4 - EIR



OAKWOOD MANOR - V4 - EIR



MAPLEWOOD MIST - V4 - EIR



WOODLAND OAK - V4 - MATT WOOD GRAIN



NORDIC GREY - V4 - MATT WOOD GRAIN



# black forest


## laminate collection

MAPLEWOOD MIST - V4 - EIR (ABOVE)

In line with latest European trends the Black Forest laminate flooring collection is manufactured in a large OVERSIZED plank providing a more natural appearance and experience. The 12mm thickness makes this floor quiet underfoot; with great sound absorption properties. Black forest is the ideal choice for high trafficked commercial environments.

Black forest collection is scratch, stain and fade resistant. With a patented Valinge 5G click system the flooring is easy to install and the high joint strength decreases the risk of joints opening or squeaking.

The dense Dare global HDF core is impregnated with a wax treatment making these planks more resistant to moisture and water damage.

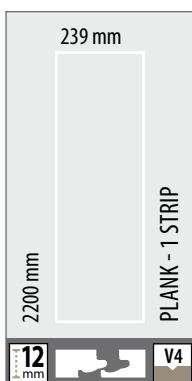

Technical specifications	Standard	Characteristic/Result
Wear resistance	EN 13329	AC4/W32 - V4
Stain resistance	EN 13329	Rating 5 - no visible change
Swelling test	EN 13329	Average swelling ≤ 8%
Light fastness	EN 13329	Grade 6 - No discolouration
Impact resistance	EN 13329	IC2

### PRODUCT INFORMATION AND WARRANTY


« Plank Dimensions: 2200 x 239 X 12mm (3.15sqm/box )

Core: Water-resistant Dare Global Core with average board density > 880/890 kg/m<sup>3</sup>






Fit for use grading: AC4/W32 – General commercial / Heavy residential

Warranty: 25 years heavy residential / 5 years moderate commercial use








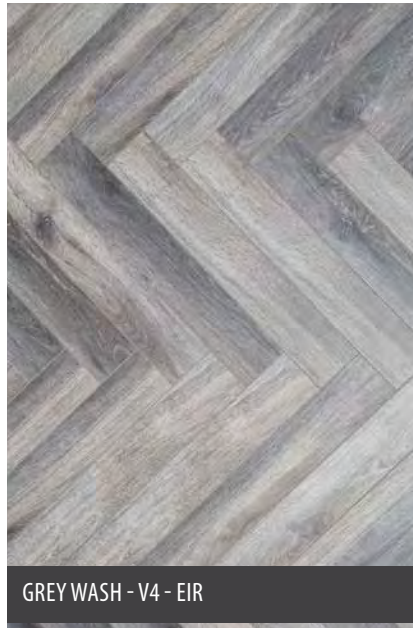

#### Authentic Herringbone - Herringbone laying patterns



#### Authentic Herringbone - Basket weave laying patterns







OAK - V4 - EIR (ABOVE)



Technical specifications	Standard	Characteristic/Result
Wear resistance	EN 13329	AC4/W32 - V4
Stain resistance	EN 13329	Rating 5 - no visible change
Swelling test	EN 13329	Average swelling < 12%
Light fastness	EN 13329	Grade 6 - No discolouration
Impact resistance	EN 13329	IC2

#### PRODUCT INFORMATION AND WARRANTY

« Plank Dimensions: 606 x 101 X 12mm (2.20sqm/box)

Core: 12mm H.D.F. core with an average board density > 880 kg/m<sup>3</sup>

Fit for use grading: AC4/W32 – General commercial / Heavy residential

Warranty: 25 years heavy residential / 5 years moderate commercial use

Authentic herringbone laminate offers all the design options of a solid wood floor, with all the benefits of laminate.

Laminates are easy to install, hardy, anti-stain, scratch and impact resistant. Our herringbone laminate flooring is 12mm thick making it quieter underfoot with a painted v-groove and realistic photo prints that look like a solid wood. The true to life wood grain is an exceptional replica of the real wood, without having the environmental impact of real wood.



# Sapphire RCB

Rigid core board vinyl flooring

## Residential Vinyl Flooring

Homeowners can celebrate as Finfloor introduces Sapphire SPC/RCB Vinyl, a rigid core board vinyl product that is made especially for residential flooring.

Sapphire Vinyl planks house a durable stone plastic composite core, making these tiles perfect for the wear and tear of daily living. Inspired by semi-precious stones, these rigid core vinyl boards are 100% waterproof and perfect for bathrooms and kitchens as they easily shrug off water without any residual damage.



Technical specifications	EN Norms	Result
Wear resistance	EN 660-2:1999/ EN 549-2011	group T
Slip resistance	EN 1404+AC	Class DS
Formaldehyde emissions	EN 1404:2004 + AC:2006	Class E1
Fire classification	EN 13501-1 EN1404 + AC	Bf1-S1

### PRODUCT INFORMATION AND WARRANTY

« Plank Dimensions: 1230 x 184 X 5.5mm (2.025sqm/box )



Core: Rigid SPC core, with 1mm IXPE underlayment attached to the back

Wear Layer: 0.3mm Super UV wear layer

Warranty: 20 years heavy residential / 5 years light commercial grade





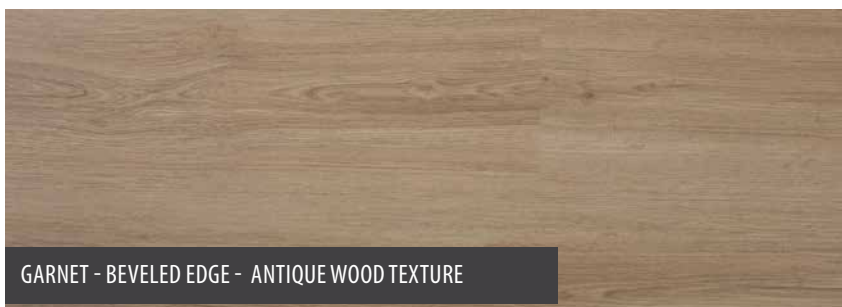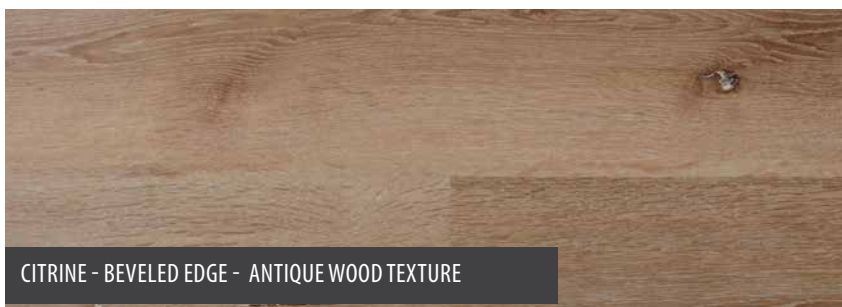

#### SUPER UV WEAR LAYER

With a double coat of UV protect wear that increases the scratch/wear and stain resistance of the product.


#### INTERNATIONAL CERTIFICATION



**ISO 14001**  
Environment Management System

# DIAMOND CORE SPC

Stone plastic composite, stable vinyl flooring

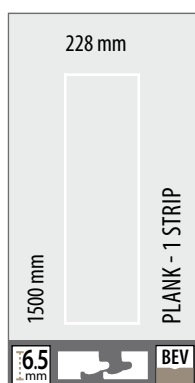

Technical specifications	EN Norms	Result
Wear resistance	EN 660-2:1999/ EN 549-2011	group T
Slip resistance	EN 1404+AC	Class DS
Formaldehyde emissions	EN 1404:2004 + AC:2006	Class E1
Fire classification	EN 13501-1 EN1404 + AC	Bf1-S1

## PRODUCT INFORMATION AND WARRANTY

« Plank Dimensions: 1500 x 228 X6.5mm (2.025sqm/box )

Core: Rigid SPC core, with 1.5mm IXPE underlayment attached to the back  
Wear Layer: 0.5mm Super UV wear Layer

Warranty: 30 years heavy residential / 10 years general commercial grade

A new generation of luxury vinyl tiles that are manufactured with a stone-plastic composite core, making them incredibly strong. Installed as a floating floor with a Unilin click system Diamond Core can be installed on many different types of floor bases, for example, concrete or ceramic flooring.

Diamond Core is formaldehyde free, making for a completely safe flooring solution for both residential and public environments.

Diamond Core vinyl flooring is 100% waterproof and physically performs 50% better than traditional luxury vinyl tiles owing to improvements in the dimensional stability. This product is more stable under extreme temperatures between -3°C and 50°C.







AGATE (ABOVE)

*100% Water-proof  
Rigid SPC core*

INTERNATIONAL CERTIFICATION



**ISO 14001**  
Environment Management System



AGATE - BEVELED EDGE - ANTIQUE WOOD TEXTURE



ALABASTER - BEVELED EDGE - ANTIQUE WOOD TEXTURE



BLUE QUARTZ - BEVELED EDGE - ANTIQUE WOOD TEXTURE




COLORADO TOPAZ - BEVELED EDGE - ANTIQUE WOOD TEXTURE



SUNSTONE - BEVELED EDGE - ANTIQUE WOOD TEXTURE



MATRIX OPAL - BEVELED EDGE - ANTIQUE WOOD TEXTURE

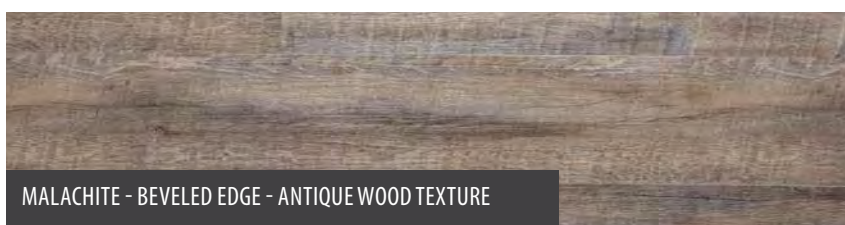

MALACHITE - BEVELED EDGE - ANTIQUE WOOD TEXTURE




BLACK DIAMOND - BEVELED EDGE - ANTIQUE WOOD TEXTURE

# DIAMOND SPC Tile

## Commercial Tiles

This innovative product uses the best of vinyl technology to create an easy to install, durable and long-lasting floor, perfectly suited to contractors and developers. These industrial grade tiles are slip-resistant, and have superb acoustic qualities surpassing requirements in international testing.

Perfect for commercial and industrial applications.

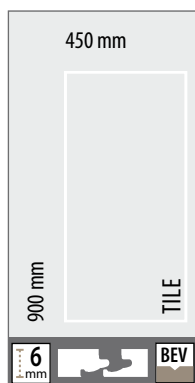

Technical specifications	EN Norms	Result
Wear resistance	EN 660-2:1999/ EN 549-2011	group T
Slip resistance	EN 1404+AC	Class DS
Formaldehyde emissions	EN 1404:2004 + AC:2006	Class E1
Fire classification	EN 13501-1 EN1404 + AC	Bf1-S1

### PRODUCT INFORMATION AND WARRANTY

« Plank Dimensions: 900 x 450 X 6mm (1.62 sqm/box )

Core: Rigid Stone Plastic Composite core

Wear Layer: 0.7mm Super UV wear layer

Warranty: 30 years heavy residential / 10 years heavy commercial grade

### EN ISO 10582 - Fit for use classification







TOURMALINE (ABOVE)



GREY PEARL - CORAL STONE FINISH - MICRO BEVELED EDGE



TOURMALINE - CORAL STONE FINISH - MICRO BEVELED EDGE

#### CORAL SURFACE FINISH

The Coral surface is the rough textured finish you can feel when you run your hand over the surface, this is to increase the slip and abrasion resistance.

#### INTERNATIONAL CERTIFICATION



Deutsches  
Institut  
für  
Bautechnik



ISO 14001  
Environment Management System



MOONSTONE - CORAL STONE FINISH - MICRO BEVELED EDGE



# FINOak

Engineered Hardwood Flooring

Oak is one of the most popular species for hardwood flooring as it is a very hard, heavy, open-grained wood with prominent rings and large pores that allow it to stain well in any color.


Finished in smooth or wire brushed which gives floors that aged, distressed look. Finoak is available in a variety of sizes, thicknesses & surface finishes with a 25 year manufacturer's warranty.





# FinOak flooring

## AVAILABLE PLANK SIZES FINISHES AND KEY

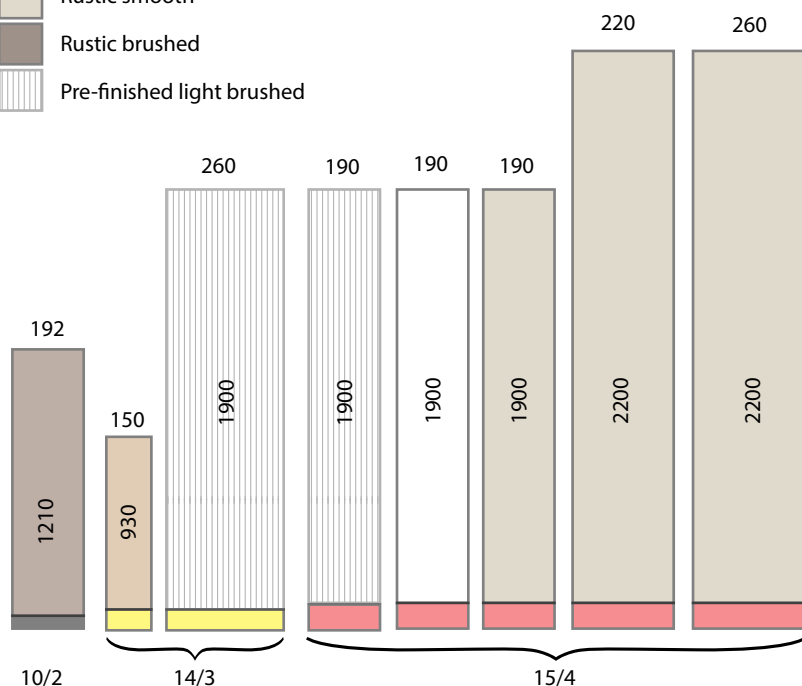

## WOOD GRADING

Each tree is unique and different parts of the same tree produce different surface textures and appearances. We import 3 grades of flooring Clear, Nature and Rustic.

The Clear grade is selected from the fine grain wood found around the center core of the log where there are no knots, each tree produces fewer clear grade planks.

Nature grade natural character has both dark and light variations with a visible increase in knots and pinholes.

Rustic grade is manufactured from the outer parts of the core where branches attach and is full of character and visibly more knotty.

## WOOD FINISH

**Smooth** planks are finished with a fine sand paper that closes the pores and grain. Smooth finishes are inclined to show dents and scratches. Best suited for use in sitting and formal dining areas with low foot traffic.

**Brushed** planks are rough wire brushed with long strokes to accentuate the grain of the wood and leave the grain of the planks open to absorb the surface treatment and stain.

## UNFINISHED OAK - AVAILABLE PLANK SIZES



	Product	Plank size width x length x height	Top face	Core	Finish	Grade	Installation
	FINOak 192	192 x 1210 x 10/2mm	2mm Oak	HDF Core	Unfinished, Brushed	Rustic	Välinge click 2G
	FINOAK Herringbone	150 x 930 x 14/3mm	3mm Oak	3-ply	Unfinished, Smooth	Nature	Tongue & groove
	FINOak 190 clear	190 x 1900 x 15/4mm	4mm Oak	3-ply	Unfinished, Smooth	Clear	Waxed fold down click
	FINOak 190	190 x 1900 x 15/4mm	4mm Oak	3-ply	Unfinished, Smooth	Rustic	Waxed fold down click
	FINOak 220	220 x 2200 x 15/4mm	4mm Oak	3-ply	Unfinished, Smooth	Rustic	Waxed fold down click
	FINOak 260	260 x 2200 x 15/4mm	4mm Oak	3-ply	Unfinished, Smooth	Rustic	Waxed fold down click

## PRE-FINISHED OAK AVAILABLE PLANK SIZES



	Product	Plank size width x length x height	Top face	Core	Finish	Grade	Installation
	FINOak Winterberg	260 x 1900 x 14/3mm	3mm Oak	3-ply	Light brushed, Matt Lacquered, Invisible UV Oiled (LOBA)	Rustic	Fold down click
	FINOak Sugarbush	260 x 1900 x 14/3mm	3mm Oak	3-ply	Light brushed, Chemical stained, Wax oiled (American wood oil)	Rustic	Fold down click
	FINOak Tsitsikama	260 x 1900 x 14/3mm	3mm Oak	3-ply	Light brushed, Smoked, White Wax oiled (American wood oil)	Rustic	Fold down click
	FINOak Cederburg	190 x 1900 x 15/4mm	4mm Oak	3-ply	Light brushed, Invisible UV lacquered (LOBA)	Rustic	Waxed fold down click
	FINOak Maluti	190 x 1900 x 15/4mm	4mm Oak	3-ply	Light brushed, White washed, UV lacquered (KLUMP)	Rustic	Waxed fold down click
	FINOak Outenniqua	190 x 1900 x 15/4mm	4mm Oak	3-ply	Light brushed, White stained, Invisible UV lacquered (KLUMP)	Rustic	Waxed fold down click

# Unfinished Oak flooring



## 3-PLY CLEAR 15/4 COMPOSITION

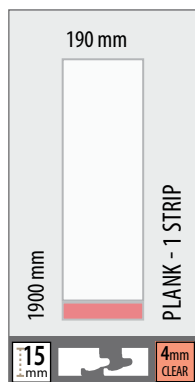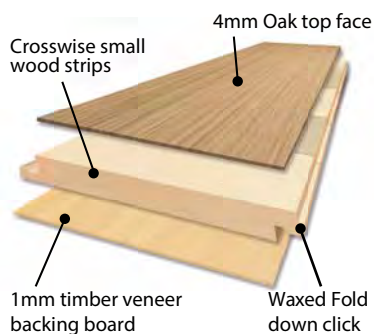



## 3-PLY RUSTIC 15/4 COMPOSITION

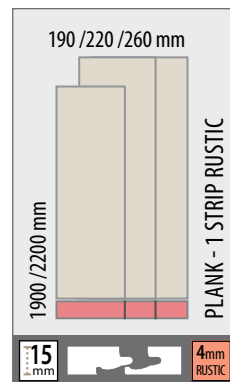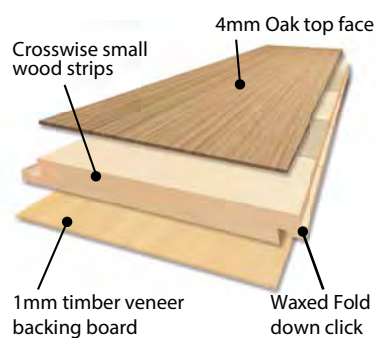

## HDF 10/2 COMPOSITION

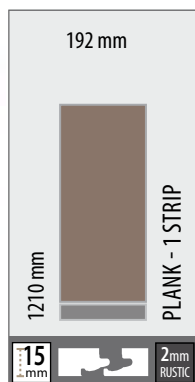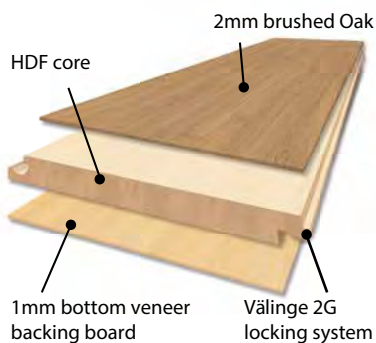

## 3-PLY HERRINGBONE 14/3 COMPOSITION

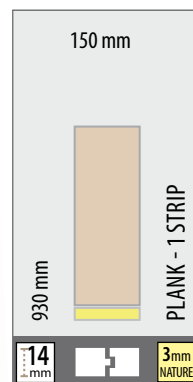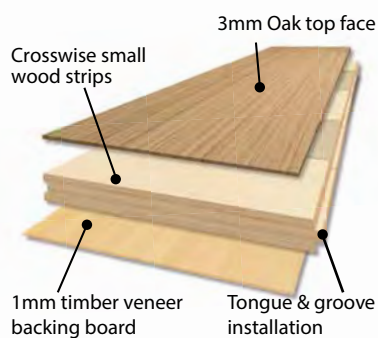





# FINOak

Engineered Hardwood Flooring

#### NOTE:

Wood is a natural product, no 2 planks are the same. These images are a representation, colours may vary from actual product. Request sample prior to ordering.

#### VALINGE 2G LOCKING SYSTEM

Välinge is a globally recognized locking system. With Välinge 2G, floor installation has never been easier.

#### WAXED FOLD DOWN CLICK SYSTEM

Finfloor waxed fold down click makes installation easy. The single action installation method secures installation with an easy fold down motion.



# FIN Oak

Engineered Hardwood Flooring

14/3 PRE-FINISHED (260 X 1900 X 14/3MM)



WINTERBERG

Matt Lacquered, Invisible UV Oiled (LOBA),  
Light-Brushed Finish



TSITSIKAMA

Smoked, White wax oiled, (American Wood Oil)  
Light-Brushed Finish



SUGARBUSH

Chemical stained, Wax Oiled (American Wood Oil),  
Light-Brushed Finish





## PRE-finished Oak flooring



OUTENNIQUA (ABOVE)

15/4 PRE-FINISHED (190 X 1900 X 15/4MM)



CEDERBERG

Invisible UV lacquered (LOBA),  
Light-Brushed Finish



MALUTI

White Washed, UV lacquered (KLUMPP),  
Light-Brushed Finish



OUTENNIQUA

White stained, UV lacquered (KLUMPP),  
Light-Brushed Finish



### NOTE:

As wood is a natural product no 2 planks are the same. These images are a representation only and colours may vary from actual product. It is recommended to see actual samples before placing an order.







#### MAINTENANCE INSTRUCTIONS FOR FLOORING

1. Sweep or vacuum the floor daily and keep as dirt free as possible.
2. After the oil has fully cured  $\pm 14$  days, use diluted Jax Wax Cleaner to clean the floor with a damp (not wet) micro fibre mop. Avoid using too much water as this may eventually damage the floor.
3. Apply Jax Maintenance Oil annually or when the wood is looking a little dry, provided a varnish has not been applied.
4. Do not leave liquid spills for any extended time on oiled floors.
5. For high-traffic flooring and to reduce maintenance, apply 2K Matt Varnish 24 hours after oiling. A minimum of 2 coats are required, but 3 to 4 coats are recommended for high traffic areas.

#### MAINTENANCE OILS





# Jax Oleum single coat oil based wood stains



## WOOD STAINS



Jax Oleum is a single coat oil-based wood stain, that protects, nourishes and colours wood in one very easy application. With over 70 colours to choose from the possibilities are endless. These are some of our favorite colours.

## TIPS AND TRICKS

- Spills should be wiped off as soon as possible.
- Jax Cleaner is recommended to try and remove spill stains.
- Jax Touch-up Markers or Brummer's Wood Filler mixed with Oleum is great for filling scratches and nicks.
- Always test a sample of the Jax Oleum colour on the wood being used. Different timbers and batches of timber affect the colour differently.
- If too much Jax Oleum has been applied and left to dry before the excess has been wiped off, leaving a shiny and tacky finish. Follow this process:
  - With diluted Jax Cleaner and a maroon pad, buff all the excess coating off
  - Wipe the surface with a clean cloth and allow to dry
  - Apply another coat of Jax Oleum and wipe the excess off after a few minutes

## GENERAL CLEANING OF WOODEN SURFACES TREATED WITH JAX OLEUM












### Do's

- ✓ Use a soft, damp cloth with diluted Jax Cleaner to gently clean oiled surfaces.
- ✓ Jax Soft Wax works well for adding a slight lustre.
- ✓ Use Jax Maintenance Oil annually or when the surface is a little dry. It will nourish the wood and give it a slight sheen.

### Don'ts


- ✗ Do not use any solvents to clean the wood (thinners, turpentine, benzene, etc.)
- ✗ Do not use harsh detergents (ammonia-based products, dishwashing liquid, etc.)
- ✗ Do not rub the surface with excessive pressure or an abrasive material.
- ✗ Do not leave liquids for long periods on the surface as they may leave a watermark.

## *Available profile colour chart*

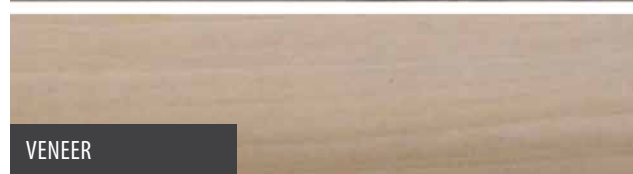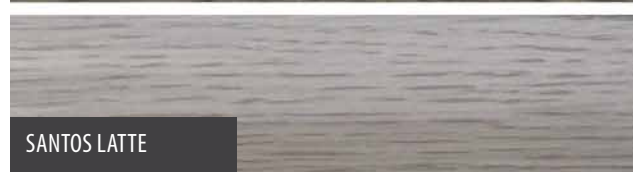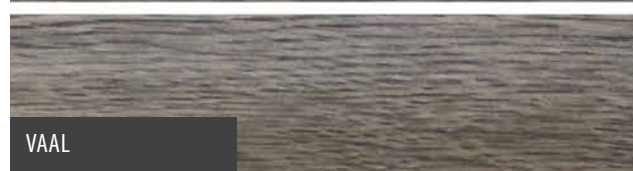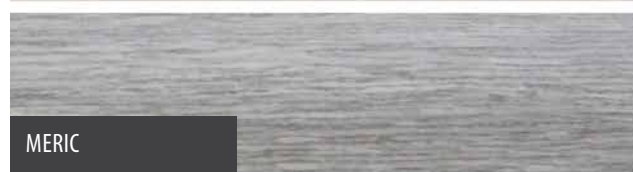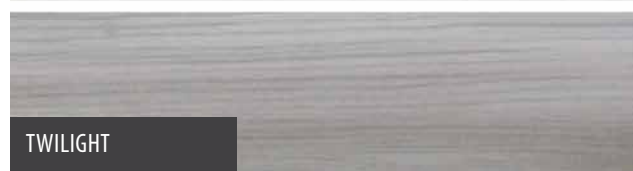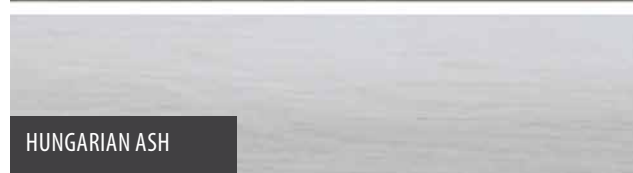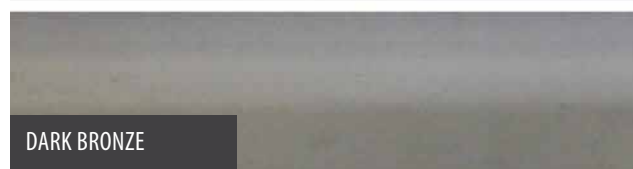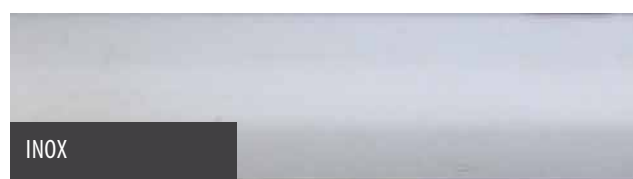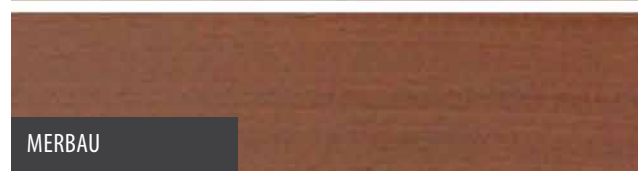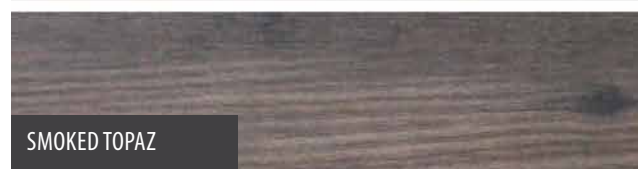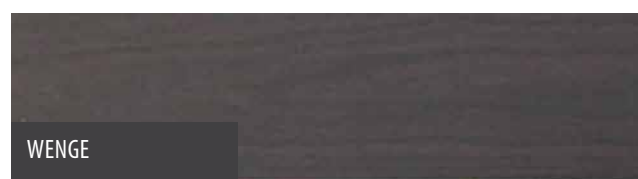




## MDF wrapped profiles




**Adaption Profile**  
41 x 12 x 2700mm

For connection floor to adjacent lower surface.




**End Profile**  
35 x 12 x 2700mm

Borders of different floor surfaces and front of sills



**Transition Profile**  
51 x 12 x 2700mm

For connection of floors of the same level




**Stair nose Profile**  
66 x 16 x 2700mm

Cover the edge between riser and step.


Save time and money with a wide selection of ready-finished and colour matched profiles. Affordable colour matching MDF profiles are for use with all our laminate ranges.

## Aluminium wrapped profiles




**Adaption Profile**  
14 x 47 x 2900mm

For connection floor to adjacent lower surface.





**End Profile**  
10 x 29.9 x 2900mm

Borders of different floor surfaces and front of sills



**Transition Profile**  
8.5 x 39.4 x 2900mm

For connection of floors of the same level




**Stair nose Profile**  
16 x 40 x 2900mm

Cover the edge between riser and step.

Aluminium profiles don't swell are available with adjustable heights and can be use with either Vinyl, Laminate or Engineered wood flooring installations with planks ranging from 4-18mm in height. End profiles come in 2 different heights, for use with either laminate or vinyl installations. To cover the end of the plank perfectly.


Remember to specify end height on order and if they are to be used with vinyl or laminate floors.

## Skirting and quads



**FINSkirting**  
80 x 16 x 2700mm

Cover expansion gaps along walls




**FINQuad**  
28 x 12 x 2700mm

Cover expansion gaps along walls and cupboards.

MDF skirting and quads are for use with all FINFLOOR laminate, vinyl and engineered wooden flooring ranges. Choose from the wide variety of colour matched profile and shirtings

## **Inovar Floor**

Independent Franchise dealer contact details:



**[info@inovar.co.za](mailto:info@inovar.co.za) | [www.inovar.co.za](http://www.inovar.co.za)**